

EXAMINED BY :  <i>[Signature]</i>	EMERGING DISPLAY  TECHNOLOGIES CORPORATION	FILE NO . CAS-10148
APPROVED BY:  <i>[Signature]</i>		ISSUE : OCT.24,2003
		TOTAL PAGE : 8
		VERSION : 5

CUSTOMER                      ACCEPTANCE                      SPECIFICATIONS

MODEL :

162G0(LED TYPES)

FOR MESSRS :

\_\_\_\_\_

CUSTOMER'S APPROVAL

DATE :  
\_\_\_\_\_

BY :  
\_\_\_\_\_

RECORDS OF REVISION	DOC . FIRST ISSUE	SEP.08,1998
---------------------	-------------------	-------------

DATE	REVISED PAGE NO.	SUMMARY																																																																																																												
NOV.09,1999	1~3 , 6 , 7	THE ENTIRE PAGES REVISED																																																																																																												
AUG.20,2002	—	TABLE OF CONTENTS ADDING 12. ROM MAP																																																																																																												
	1	2. MECHANICAL SPECIFICATIONS ( 12 ) ROM CODE : EW162G0GLY*59 SPLC780C-02A-C ( ENGLISH / EUROPEAN )																																																																																																												
	8	ADD ING 12. ROM MAP																																																																																																												
MAY.05,2003	1	2. MECHANICAL SPECIFICATIONS ( 3 ) EFFECTIVE AREA ----- 64.5W*13.8H mm → 66.0W*16Hmm																																																																																																												
OCT.24,2003	3	4. ELECTRICAL CHARACTERISTICS																																																																																																												
		<table border="1"> <thead> <tr> <th>PARAMETER</th> <th>SYMBOL</th> <th>CONDITION</th> <th>MIN .</th> <th>TYP .</th> <th>MAX .</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td rowspan="3">RECOMMENDED LCD DRIVING VOLTAGE</td> <td rowspan="3">VDD - VO ∅ = 10 ° , θ = 0 ° DUTY= 1/16</td> <td>Ta = -20 °C</td> <td>—</td> <td>4.4</td> <td>—</td> <td>V</td> </tr> <tr> <td>Ta = 25 °C</td> <td>—</td> <td>4.4</td> <td>—</td> <td>V</td> </tr> <tr> <td>Ta = 70 °C</td> <td>—</td> <td>4.4</td> <td>—</td> <td>V</td> </tr> </tbody> </table> <p style="text-align: center;">↓</p> <table border="1"> <thead> <tr> <th>PARAMETER</th> <th>SYMBOL</th> <th>CONDITION</th> <th>MIN .</th> <th>TYP .</th> <th>MAX .</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td rowspan="3">RECOMMENDED LCD DRIVING VOLTAGE</td> <td rowspan="3">VDD - VO ∅ = 10 ° , θ = 0 ° DUTY= 1/16</td> <td>Ta = -20 °C</td> <td>3.9</td> <td>4.4</td> <td>4.9</td> <td>V</td> </tr> <tr> <td>Ta = 25 °C</td> <td>3.9</td> <td>4.4</td> <td>4.9</td> <td>V</td> </tr> <tr> <td>Ta = 70 °C</td> <td>3.9</td> <td>4.4</td> <td>4.9</td> <td>V</td> </tr> </tbody> </table>	PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT	RECOMMENDED LCD DRIVING VOLTAGE	VDD - VO ∅ = 10 ° , θ = 0 ° DUTY= 1/16	Ta = -20 °C	—	4.4	—	V	Ta = 25 °C	—	4.4	—	V	Ta = 70 °C	—	4.4	—	V	PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT	RECOMMENDED LCD DRIVING VOLTAGE	VDD - VO ∅ = 10 ° , θ = 0 ° DUTY= 1/16	Ta = -20 °C	3.9	4.4	4.9	V	Ta = 25 °C	3.9	4.4	4.9	V	Ta = 70 °C	3.9	4.4	4.9	V																																																												
PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT																																																																																																								
RECOMMENDED LCD DRIVING VOLTAGE	VDD - VO ∅ = 10 ° , θ = 0 ° DUTY= 1/16	Ta = -20 °C	—	4.4	—	V																																																																																																								
		Ta = 25 °C	—	4.4	—	V																																																																																																								
		Ta = 70 °C	—	4.4	—	V																																																																																																								
PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT																																																																																																								
RECOMMENDED LCD DRIVING VOLTAGE	VDD - VO ∅ = 10 ° , θ = 0 ° DUTY= 1/16	Ta = -20 °C	3.9	4.4	4.9	V																																																																																																								
		Ta = 25 °C	3.9	4.4	4.9	V																																																																																																								
		Ta = 70 °C	3.9	4.4	4.9	V																																																																																																								
5. OPTICAL CHARACTERISTICS																																																																																																														
<table border="1"> <thead> <tr> <th>I T E M</th> <th>SYMBOL</th> <th>CONDITION</th> <th>MIN .</th> <th>TYP .</th> <th>MAX .</th> <th>UNIT</th> <th>NOTE</th> </tr> </thead> <tbody> <tr> <td>VIEWING AREA</td> <td>∅ 2 - ∅1</td> <td>K ≥ 1.4</td> <td>3.0</td> <td>—</td> <td>—</td> <td>deg.</td> <td>1</td> </tr> <tr> <td rowspan="5">RESPONSE TIME</td> <td rowspan="2">tr ( rise )</td> <td rowspan="5">∅ = 10° θ = 0°</td> <td>Ta = -20°C</td> <td>—</td> <td>5538</td> <td>—</td> <td rowspan="5">ms</td> <td rowspan="5">1</td> </tr> <tr> <td>Ta = 25°C</td> <td>—</td> <td>228</td> <td>—</td> </tr> <tr> <td>Ta = 70°C</td> <td>—</td> <td>104</td> <td>—</td> </tr> <tr> <td rowspan="2">tf ( fall )</td> <td>Ta = -20°C</td> <td>—</td> <td>2316</td> <td>—</td> </tr> <tr> <td>Ta = 25°C</td> <td>—</td> <td>174</td> <td>—</td> </tr> <tr> <td rowspan="2">THE BRIGHTNESS OF BACK-LIGHT</td> <td rowspan="2">L</td> <td rowspan="2">VDD = 5.0 V</td> <td>—</td> <td>20</td> <td>—</td> <td rowspan="2">cd/m<sup>2</sup></td> <td>1, 2</td> </tr> <tr> <td>—</td> <td>40</td> <td>—</td> <td>1, 3</td> </tr> </tbody> </table> <p style="text-align: center;">↓</p> <table border="1"> <thead> <tr> <th>I T E M</th> <th>SYMBOL</th> <th>CONDITION</th> <th>MIN .</th> <th>TYP .</th> <th>MAX .</th> <th>UNIT</th> <th>NOTE</th> </tr> </thead> <tbody> <tr> <td>VIEWING ANGLE</td> <td>∅ 2 - ∅1</td> <td>K ≥ 1.4</td> <td>3.0</td> <td>—</td> <td>—</td> <td>deg.</td> <td>1</td> </tr> <tr> <td rowspan="6">RESPONSE TIME</td> <td rowspan="2">tr ( rise )</td> <td rowspan="6">∅ = 10° θ = 0°</td> <td>Ta = -20°C</td> <td>—</td> <td>5538</td> <td>11076</td> <td rowspan="6">ms</td> <td rowspan="6">1</td> </tr> <tr> <td>Ta = 25°C</td> <td>—</td> <td>228</td> <td>456</td> </tr> <tr> <td>Ta = 70°C</td> <td>—</td> <td>104</td> <td>208</td> </tr> <tr> <td rowspan="2">tf ( fall )</td> <td>Ta = -20°C</td> <td>—</td> <td>2316</td> <td>4632</td> </tr> <tr> <td>Ta = 25°C</td> <td>—</td> <td>174</td> <td>348</td> </tr> <tr> <td rowspan="2">THE BRIGHTNESS OF MODULE</td> <td rowspan="2">L</td> <td rowspan="2">VDD = 5.0 V</td> <td>15</td> <td>20</td> <td>—</td> <td rowspan="2">cd/m<sup>2</sup></td> <td>1, 2</td> </tr> <tr> <td>22.5</td> <td>30</td> <td>—</td> <td>1, 3</td> </tr> </tbody> </table>			I T E M	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT	NOTE	VIEWING AREA	∅ 2 - ∅1	K ≥ 1.4	3.0	—	—	deg.	1	RESPONSE TIME	tr ( rise )	∅ = 10° θ = 0°	Ta = -20°C	—	5538	—	ms	1	Ta = 25°C	—	228	—	Ta = 70°C	—	104	—	tf ( fall )	Ta = -20°C	—	2316	—	Ta = 25°C	—	174	—	THE BRIGHTNESS OF BACK-LIGHT	L	VDD = 5.0 V	—	20	—	cd/m <sup>2</sup>	1, 2	—	40	—	1, 3	I T E M	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT	NOTE	VIEWING ANGLE	∅ 2 - ∅1	K ≥ 1.4	3.0	—	—	deg.	1	RESPONSE TIME	tr ( rise )	∅ = 10° θ = 0°	Ta = -20°C	—	5538	11076	ms	1	Ta = 25°C	—	228	456	Ta = 70°C	—	104	208	tf ( fall )	Ta = -20°C	—	2316	4632	Ta = 25°C	—	174	348	THE BRIGHTNESS OF MODULE	L	VDD = 5.0 V	15	20	—	cd/m <sup>2</sup>	1, 2	22.5	30	—	1, 3
I T E M	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT	NOTE																																																																																																							
VIEWING AREA	∅ 2 - ∅1	K ≥ 1.4	3.0	—	—	deg.	1																																																																																																							
RESPONSE TIME	tr ( rise )	∅ = 10° θ = 0°	Ta = -20°C	—	5538	—	ms	1																																																																																																						
			Ta = 25°C	—	228	—																																																																																																								
	Ta = 70°C		—	104	—																																																																																																									
	tf ( fall )		Ta = -20°C	—	2316	—																																																																																																								
			Ta = 25°C	—	174	—																																																																																																								
THE BRIGHTNESS OF BACK-LIGHT	L	VDD = 5.0 V	—	20	—	cd/m <sup>2</sup>	1, 2																																																																																																							
			—	40	—		1, 3																																																																																																							
I T E M	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT	NOTE																																																																																																							
VIEWING ANGLE	∅ 2 - ∅1	K ≥ 1.4	3.0	—	—	deg.	1																																																																																																							
RESPONSE TIME	tr ( rise )	∅ = 10° θ = 0°	Ta = -20°C	—	5538	11076	ms	1																																																																																																						
			Ta = 25°C	—	228	456																																																																																																								
	Ta = 70°C		—	104	208																																																																																																									
	tf ( fall )		Ta = -20°C	—	2316	4632																																																																																																								
			Ta = 25°C	—	174	348																																																																																																								
	THE BRIGHTNESS OF MODULE		L	VDD = 5.0 V	15	20			—	cd/m <sup>2</sup>	1, 2																																																																																																			
22.5		30			—	1, 3																																																																																																								

NUMBERING SYSTEM

Polarizer Mode	Backlight	Code value
Transflective	LED	L
Transmissive *	LED	M

Backlight Color	Code Value
Yellow-Green	Y

E	W	1	6	2	G	0	G	L	Y
---	---	---	---	---	---	---	---	---	---

LCD type + LCD color	Code Value
Yellow-Green	Y
STN + Gray	G
STN + Blue	B

MODEL NO.	VERSION	PAGE
162G0 (LED TYPES)	5	0-3

TABLE OF CONTENTS

NO.	ITEM	PAGE
1.	GENERAL SPECIFICATIONS -----	1
2.	MECHANICAL SPECIFICATIONS -----	1
3.	ABSOLUTE MAXIMUM RATINGS -----	2
4.	ELECTRICAL CHARACTERISTICS -----	3
5.	OPTICAL CHARACTERISTICS -----	3
6.	OUTLINE DIMENSIONS -----	4
7.	DETAIL DRAWING OF DOT MATRIX -----	5
8.	BLOCK DIAGRAM -----	5
9.	INTERFACE SIGNALS -----	6
10.	POWER SUPPLY -----	7
11.	DISPLAY DATA RAM ADDRESS -----	7
12.	ROM MAP -----	8

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

EU - 002A

1.2 APPLICATION NOTES FOR CONTROLLER / DRIVER :

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

EU - KS0066

1.3 THIS INDIVIDUAL SPECIFICATIONS IS PRIOR TO GENERAL SPECIFICATIONS .

2. MECHANICAL SPECIFICATIONS

- (1) NUMBER OF CHARACTER ----- 16 CH \* 2 LINES
- (2) MODULE SIZE ----- 80.0W \* 36.0H \* 14.0D (max.) mm
- (3) EFFECTIVE AREA ----- 66.0W \* 16H mm
- (4) CHARACTER FONT ----- 5 \* 7 DOTS + CURSOR
- (5) CHARACTER SIZE ----- 2.96W \* 5.56H mm
- (6) CHARACTER PITCH ----- 3.55W \* 5.94H mm
- (7) DOT SIZE ----- 0.56W \* 0.66H mm
- (8) DOT PITCH ----- 0.60W \* 0.70H mm
- (9) LCD TYPE \*
- (10) DRIVING METHOD ----- 1 / 16 DUTY MULTIPLEX DRIVE
- (11) BACK-LIGHT \*
- (12) ROM CODE ----- EW162G0GLY\*59  
SPLC780C-02A-C ( ENGLISH/EUROPEAN )

\* PLEASE REFER TO NUMBERING SYSTEM

### 3. ABSOLUTE MAXIMUM RATINGS

#### 3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS . ( AT Ta = 25 °C )

PARAMETER	SYMBOL	MIN .	MAX .	UNIT	REMARK
POWER SUPPLY FOR LOGIC	VDD – VSS	0	7.0	V	
POWER SUPPLY FOR LCD DRIVE	VDD – VO	0	13.0	V	
INPUT VOLTAGE	VI	VSS	VDD	V	
STATIC ELECTRICITY	—	—	100	V	NOTE (1)
LED POWER DISSIPATION	PD	—	1.26	W	
LED FORWARD CURRENT	IF	—	220	mA	
LED REVERSE VOLTAGE	VR	—	8	V	

NOTE (1) : TEST METHOD AND CONDITIONS :  
AFTER CHARGING UP 200 PF CAPACITOR BY STATED VOLTAGE ,  
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE  
MODULE .

#### 3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS .

I T E M	OPERATING		STORAGE		REMARK
	MIN .	MAX .	MIN .	MAX .	
AMBIENT TEMPERATURE	-20°C	70°C	-30°C	80°C	NOTE (2), (3)
HUMIDITY	—	90 % RH	—	90 % RH	WITHOUT CONDENSATION
VIBRATION	—	4.9 m/s <sup>2</sup> (0.5 G)	—	19.6 m/s <sup>2</sup> (2 G)	
SHOCK	—	29.4 m/s <sup>2</sup> (3 G)	—	490.0 m/s <sup>2</sup> (50 G)	XYZ DIRECTIONS
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		

NOTE (2) : Ta AT -30°C : 48HR MAX .  
80°C : 168HR MAX .

NOTE (3) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT  
TEMPERATURE THIS PHENOMENON IS REVERSIBLE .

4. ELECTRICAL CHARACTERISTICS

Ta = 25 °C VDD = 5.0 ±0.25 V

PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT
H LEVEL INPUT VOLTAGE	VIH	—	2.2	—	—	V
L LEVEL INPUT VOLTAGE	VIL	—	—	—	0.6	V
H LEVEL OUTPUT VOLTAGE	VOH	-IOH = 0.2 mA	2.4	—	—	V
L LEVEL OUTPUT VOLTAGE	VOL	IOL = 1.2 mA	—	—	0.4	V
POWER SUPPLY CURRENT (LOGIC)	IDD	VDD = 5.0 V	—	1.0	3.0	mA
RECOMMENDED LCD DRIVING VOLTAGE	VDD - VO ∅ = 10°, θ = 0° DUTY= 1/16	Ta = -20 °C	3.9	4.4	4.9	V
		Ta = 25 °C	3.9	4.4	4.9	V
		Ta = 70 °C	3.9	4.4	4.9	V
CLOCK OSCILLATION FREQUENCY	FOSC	Ta = 25 °C	—	270	—	KHZ
LED FORWARD VOLTAGE	VF	IF=110mA	—	4.2	4.6	V
LED FORWARD CURRENT	IF	—	—	110	—	mA
LED REVERSE CURRENT	IR	VR=8V	—	—	0.2	mA

5. OPTICAL CHARACTERISTICS .

Ta = 25 °C VDD = 5.0 V


I T E M	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT	NOTE	
VIEWING ANGLE	∅2 - ∅1	K ≥ 1.4	30	—	—	deg.	1	
CONTRAST RATIO	K	∅ = 10° θ = 0°	5	—	—	—	1	
RESPONSE TIME	tr ( rise )	∅ = 10° θ = 0°	Ta = -20°C	—	5538	11076	ms	1
			Ta = 25°C	—	228	456		
			Ta = 70°C	—	104	208		
	tf ( fall )		Ta = -20°C	—	2316	4632		
			Ta = 25°C	—	174	348		
			Ta = 70°C	—	85	170		
THE BRIGHTNESS OF MODULE	L	VDD = 5.0 V	15	20	—	cd/m <sup>2</sup>	1, 2	
			22.5	30	—		1, 3	
PEAK EMISSION WAVELENGTH	λP	VDD = 5.0 V	—	572	—	nm	1	

NOTE (1) : PLEASE REFER TO :  
CUSTOMER ACCEPTANCE STANDARD SPECIFICATION : EU-002A

NOTE (2) : POLARIZER MODE : TRANSFLECTIVE

NOTE (3) : POLARIZER MODE : TRANSMISSIVE


6. OUTLINE DIMENSIONS

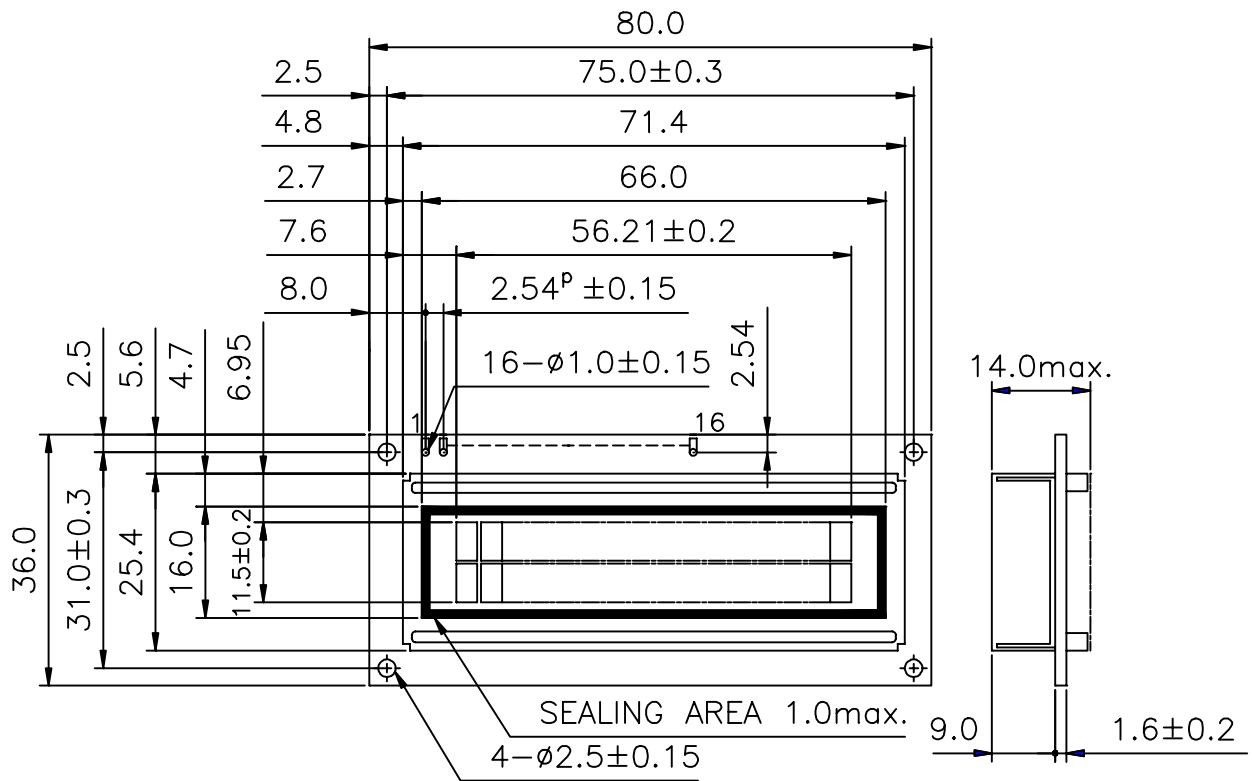

UNIT : mm  
SCALE : NTS  
NOT SPECIFIED TOLERANCE IS ±0.5




7. DETAIL DRAWING OF DOT MATRIX

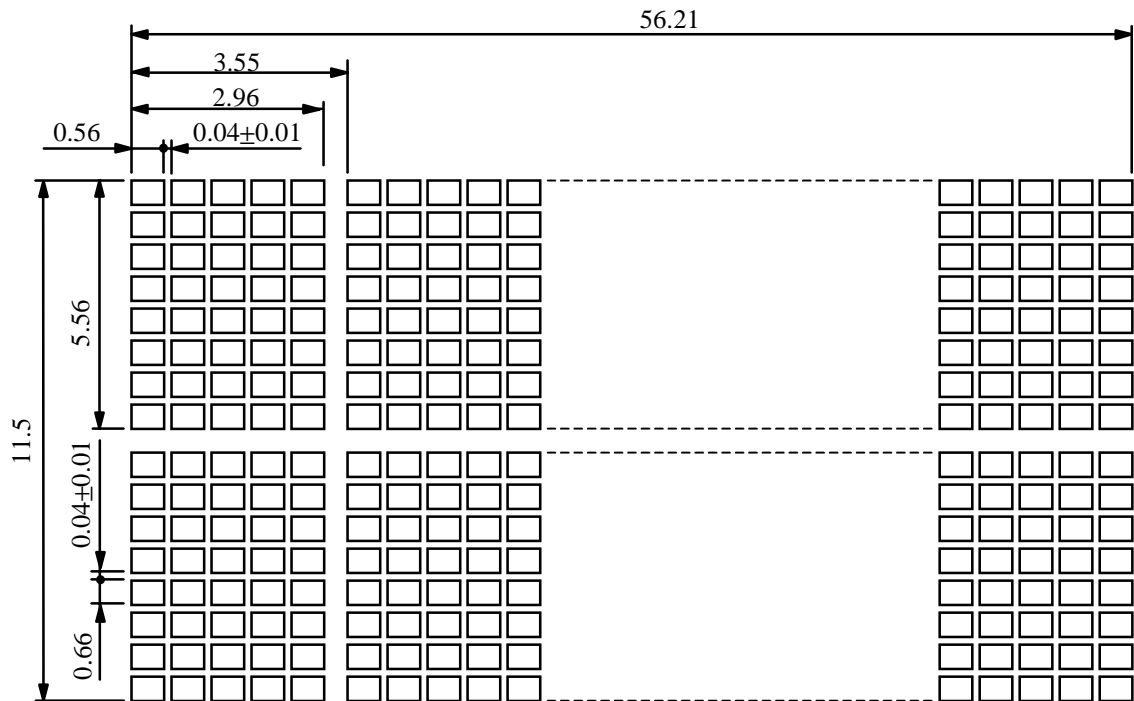

UNIT : mm  
SCALE : NTS  
NOT SPECIFIED TOLERANCE IS ± 0.1

8. BLOCK DIAGRAM

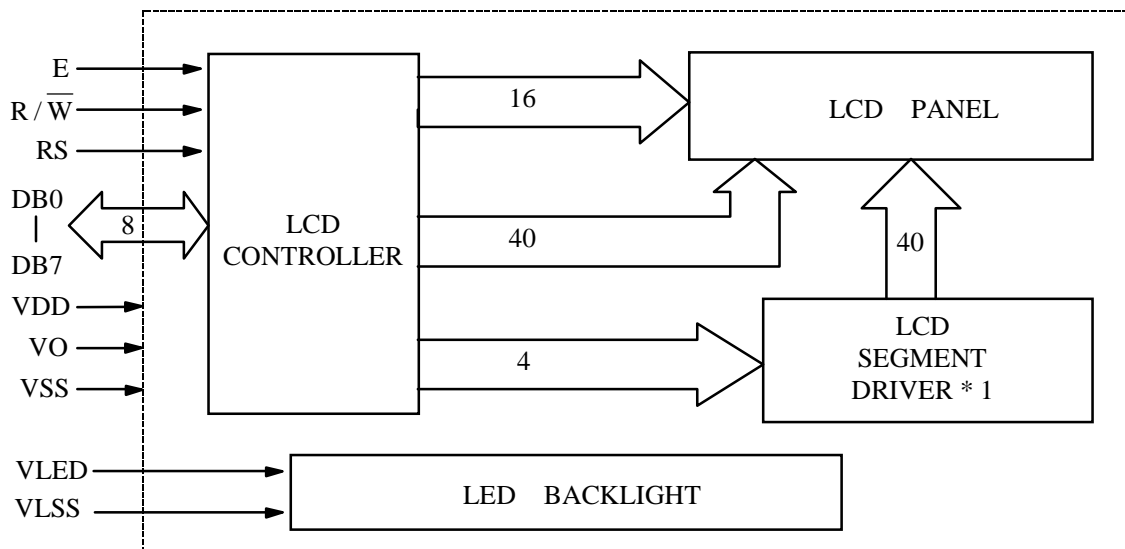


9. INTERFACE SIGNALS

PIN NO.	SYMBOL	DESCRIPTION	FUNCTION
1	VSS	GROUND	0V (GND)
2	VDD	POWER SUPPLY FOR LOGIC CIRCUIT	+5V
3	VO	LCD CONTRAST ADJUSTMENT	
4	RS	INSTRUCTION/DATA REGISTER SELECTION	RS = 0 : INSTRUCTION REGISTER RS = 1 : DATA REGISTER
5	R / $\overline{W}$	READ/WRITE SELECTION	R / $\overline{W}$ = 0 : REGISTER WRITE R / $\overline{W}$ = 1 : REGISTER READ
6	E	ENABLE INPUT	
7	DB0	DATA INPUT/OUTPUT LINES	4 BIT/8BIT SELECTABLE 4 BIT : DB4 - DB7 8 BIT : DB0 - DB7
8	DB1		
9	DB2		
10	DB3		
11	DB4		
12	DB5		
13	DB6		
14	DB7		
15	VLED	POWER SUPPLY FOR LED BACKLIGHT (ANODE)	—
16	VLSS	POWER SUPPLY FOR LED BACKLIGHT (CATHODE)	0V(GND)


10. POWER SUPPLY

10.1 POWER SUPPLY FOR LCD MODULE

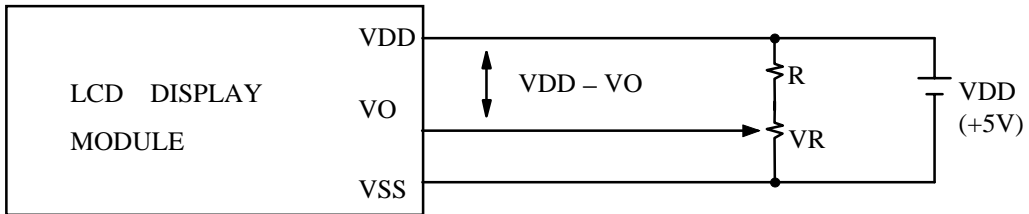

VDD - VO : LCD DRIVING VOLTAGE  
 VR : 10KΩ ~ 20KΩ  
 RECOMMENDED RESISTOR R :  $VDD - VO \geq 1.5 V$

10.2 POWER SUPPLY FOR LED BACKLIGHT

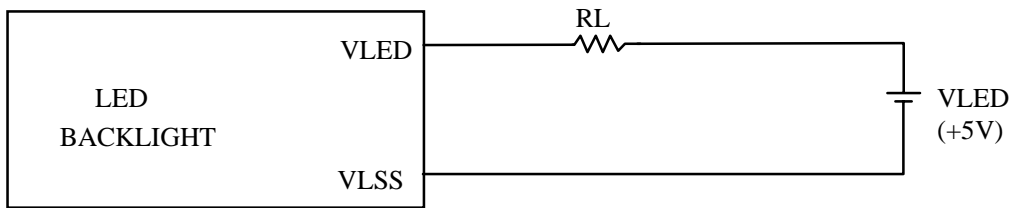

RECOMMENDED RESISTOR  $RL = 6 \sim 15\Omega, 1/4 W$ , (CONTROLLED BY USER)  
 \* THE BRIGHTNESS WOULD BE ALTERED SUBJECT TO DIFFERENT VALUES OF RL

11. DISPLAY DATA RAM ADDRESS

CHARACTER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
LINE 1	80	81	82	83	84	85	86	87	88	89	8A	8B	8C	8D	8E	8F
LINE 2	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	CA	CB	CC	CD	CE	CF

12. ROM MAP  
SPLC 780C-02A-C

Upper 4 bit Lower 4 bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HALL	HHLH	HHHL	HHHH
LLLL				0	1	2	3	4	5	6	7	8	9	A	B	C
LLLH			!	0	1	2	3	4	5	6	7	8	9	A	B	C
LLHL			"	0	1	2	3	4	5	6	7	8	9	A	B	C
LLHH			#	0	1	2	3	4	5	6	7	8	9	A	B	C
LHLL			\$	0	1	2	3	4	5	6	7	8	9	A	B	C
LHLH			%	0	1	2	3	4	5	6	7	8	9	A	B	C
LHHL			&	0	1	2	3	4	5	6	7	8	9	A	B	C
LHHH			'	0	1	2	3	4	5	6	7	8	9	A	B	C
HLLL			(	0	1	2	3	4	5	6	7	8	9	A	B	C
HLLH			)	0	1	2	3	4	5	6	7	8	9	A	B	C
HLHL			*	0	1	2	3	4	5	6	7	8	9	A	B	C
HLHH			+	0	1	2	3	4	5	6	7	8	9	A	B	C
HHLL			,	0	1	2	3	4	5	6	7	8	9	A	B	C
HHLH			-	0	1	2	3	4	5	6	7	8	9	A	B	C
HHHL			.	0	1	2	3	4	5	6	7	8	9	A	B	C
HHHH			/	0	1	2	3	4	5	6	7	8	9	A	B	C